


## Part. S0262



### Chain - guide profile




Material UHMWPE	Packaging metres	Code
ULF - brown red	45	<b>UL640913</b>
Green	45	<b>632272</b>
Black	45	<b>63651</b>

- Standard packaging: coil.

## Part. S0386



### Chain - guide profile




Material UHMWPE	Packaging metres	Code
ULF - brown red	45	<b>UL648363</b>
Black	45	<b>66096</b>


- Can be used in combination with Part. S0387.  
- Standard packaging: coil.

- **Material:** Polyethylene UHMWPE with molecular density 5.600.000 g/mol.  
Characteristics: new material Polyethylene ULF brown red (UHMWPE): reduced friction coefficient, higher wear resistance.
  - **Linear expansion coefficient:**  $2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$   
Calculation of thermal expansion see Technical information.
  - **Operating temperature Green Black:**  
In air (- 40 to + 80 °C).  
In hot water (+ 70 °C).
  - **Operating temperature ULF - brown red:**  
In air (- 40 to + 45 °C).  
In hot water (+ 45 °C).
  - **Polyethylene ULF is FDA approved**  
Polyethylene ULF complies with the Code of Federal Regulations Title 21, § 177.1520 "Olefin Polymers" of the Food and Drug Administration (FDA) of April 1, 2008.
  - Coefficient of friction between chain POM and wearstrip ULF: 0,08  
Note: for calculation of chain pull refer to Technical Support.
  - **Position of guides.** See Technical information.
- **TableTop® chains series 812 - 815 - 820 - 831 - 881TAB - 8811TAB - 879TAB - 880TAB**


Chain width 82,5 mm (K 325) / Guide clearance 45 mm

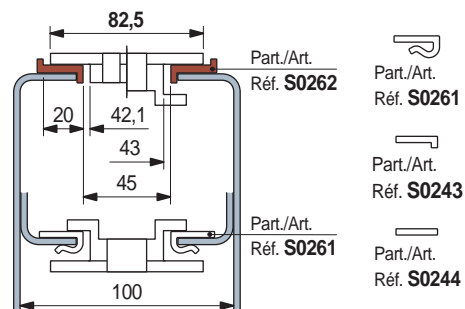

Chain width 114,3 mm (K 450)

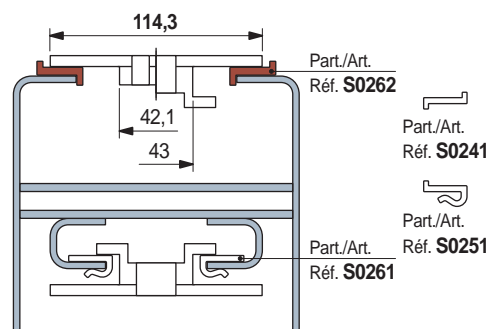

Chain width 82,5 mm (K 325) / Pitch 85 mm

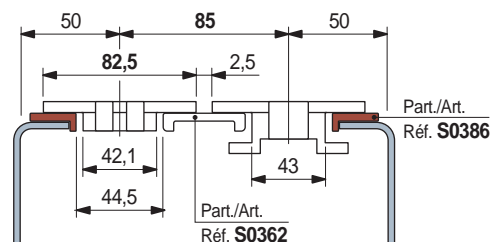

● Best Seller

● Standard

● On request: minimum quantity may apply. Consult our Customer Service for availability.

Item code for order = Part. + Code