


## Part. S0422



### Chain - guide profile

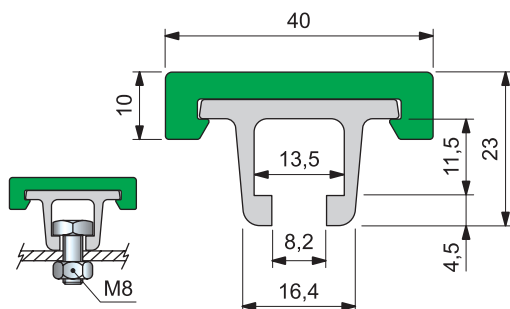

Assembly with M8 hexagon bolt

Metal profile material	Length metres	Code	Weight kg/m
Anodized aluminium	3	65248M	0,70
	6	65258M	

- Colour: green.
- Standard packaging: the plastic and metal profiles are supplied assembled.
- Packaging: 24 metres.

## Part. S0370



### Sealing profile



Material	Packaging metres	Code
Rubber EPDM 80 (black)	20	61036

- Use: when applied to the metal profile, this product improves guide cleanliness.
- Standard packaging: coil.

## Part. S0396



### Connecting bar

Material	Code	Weight kg
Zinc plated steel	69995	0,10

- Packaging: 8 pieces.

● Best Seller


● Standard

● On request: minimum quantity may apply. Consult our Customer Service for availability.

Item code for order = Part. + Code


- **Material:** Polyethylene UHMWPE with molecular density 5.600.000 g/mol. Characteristics: new material Polyethylene ULF brown red (UHMWPE): reduced friction coefficient, higher wear resistance.
- **Linear expansion coefficient:**  $2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$   
Calculation of thermal expansion see Technical information.
- **Operating temperature Green Black:**  
In air (- 40 to + 80 °C).  
In hot water (+ 70 °C).
- **Operating temperature ULF - brown red:**  
In air (- 40 to + 45 °C).  
In hot water (+ 45 °C).
- **Polyethylene ULF is FDA approved**  
Polyethylene ULF complies with the Code of Federal Regulations Title 21, § 177.1520 "Olefin Polymers" of the Food and Drug Administration (FDA) of April 1, 2008.
- Coefficient of friction between chain POM and wearstrip ULF: 0,08  
Note: for calculation of chain pull refer to Technical Support.
- **Position of guides.** See Technical information.

### Deflection

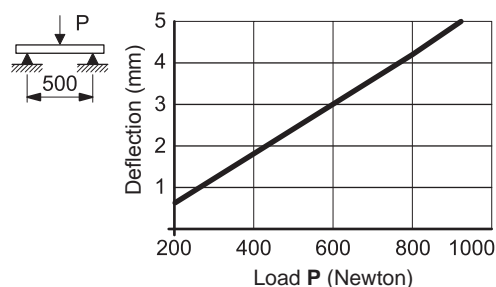


- **TableTop® chains** series 812 - 815 - 820 - 831 - 881TAB - 8811TAB - 879TAB - 880TAB

Chain width 82,5 mm (K 325) / Pitch 85 mm

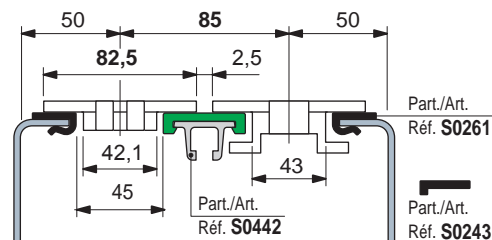

Chain width 82,5 mm (K 325) / Pitch 83,5 mm

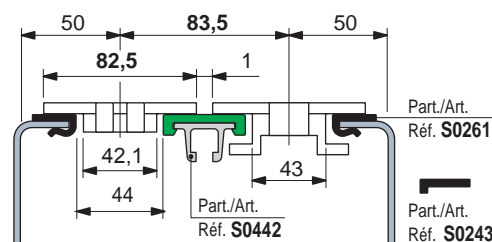

### Assembly of Part. S0369

Insert the guides and tighten the set screws.

