



- **Material:** Polyethylene UHMWPE with molecular density 5.600.000 g/mol.
Characteristics: new material Polyethylene ULF brown red (UHMWPE): reduced friction coefficient, higher wear resistance.
- **Linear expansion coefficient:** $2 \times 10^{-4} \text{ } ^\circ\text{C}^{-1}$
Calculation of thermal expansion see Technical information.
- **Operating temperature ULF - brown red:**
In air (- 40 to + 45 °C).
In hot water (+ 45 °C).
- **Polyethylene ULF is FDA approved**
Polyethylene ULF complies with the Code of Federal Regulations Title 21, § 177.1520 "Olefin Polymers" of the Food and Drug Administration (FDA) of April 1, 2008.

- **Use Part. S0594 - S0654 - S0835**
Overhead transport of PET bottles.

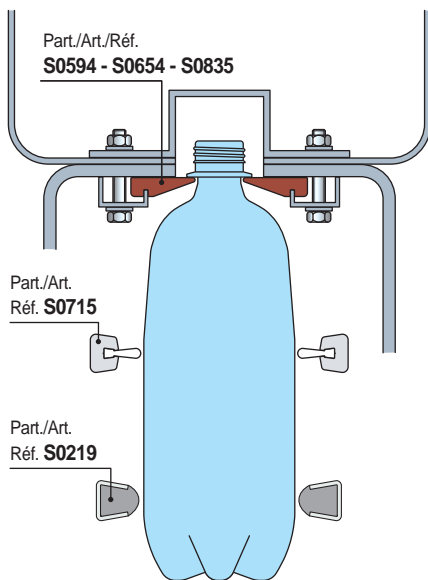

Neck transport guides




Material	Length metres	Code
UHMWPE		
ULF - brown red	3	UL691702N
	6	UL691712N

- Min. curvature radius: 750 mm.
- Packaging: 45 metres (in 3 m length 10Ft).
90 metres (in 6 m length).

Part. S0594



Neck transport guides

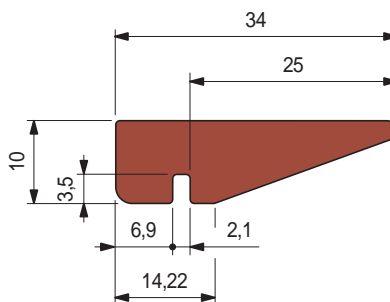

Material	Length metres	Code
UHMWPE		
ULF - brown red	3	UL691722N
	6	UL691732N

- Min. curvature radius: 750 mm.
- Packaging: 90 metres.

Part. S0654



- **Best Seller**
- **Standard**
- **On request:** minimum quantity may apply. Consult our Customer Service for availability.

Item code for order = Part. + Code